

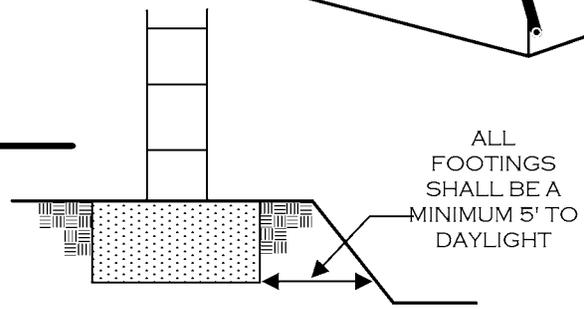
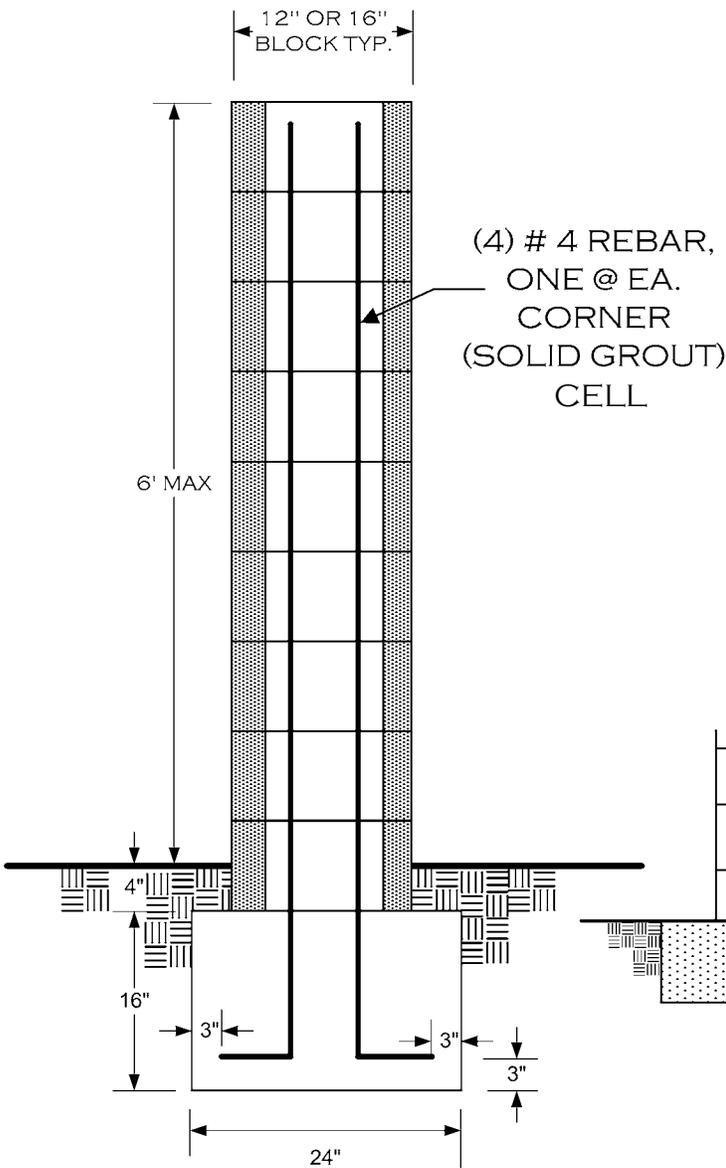


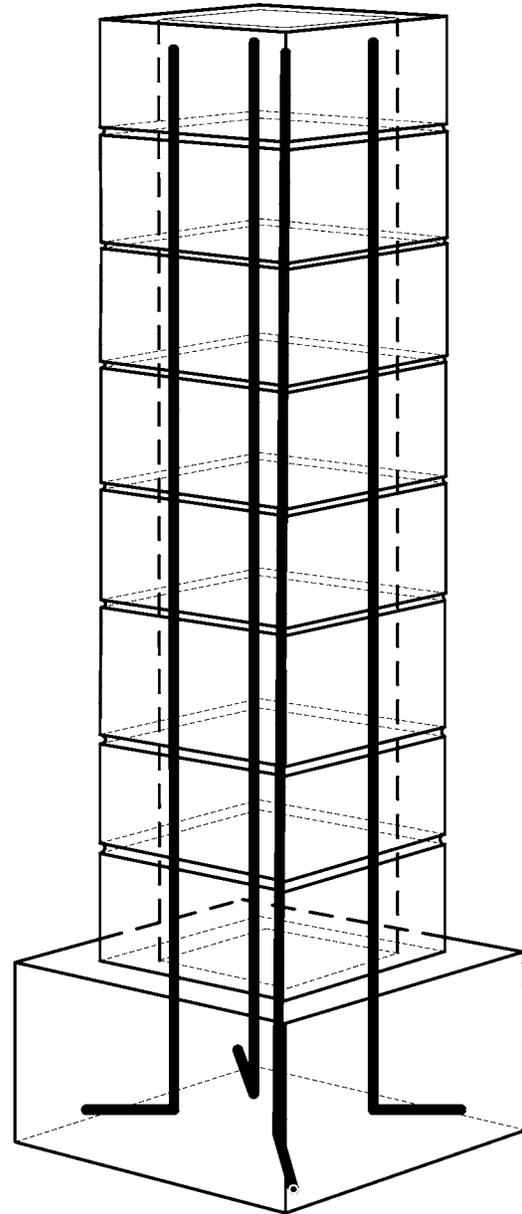

Covina Building Division
Pilaster Standard Detail



NOTE: ALL REBAR MUST OVERLAP MIN. 24"

Block Wall Inspections Required:

1. SURVEYORS MARKERS (stakes/markers shall be left in place for footing inspection)
2. FOOTINGS AND STEEL/REBAR (horizontal footing rebar and vertical wall rebar extending from footings shall be in place)
3. GROUT LIFT (rebar at mid level prior to grouting)
4. FINAL GROUT LIFT (after all blocks in place; vertical rebar inspection)
5. FINAL (wall complete)